H08052


All product specifications and certifications are subject to change.

GAS: 10000 / 8000 WATT - LPG: 9050 / 7250 WATT50A 120/240V
ELECTRIC START GAS OR PROPANE DUAL FUEL PORTABLE GENERATOR
EPA AND cETL CERTIFIED ANSI / PGMA G300-2018 COMPLIANT

FIRMAN POWER EQUIPMENT
8644 W. Ludlow Dr.
Peoria, AZ 85381
1-844-347-6261
WWW.FIRMANPOWEREQUIPMENT.COM


UPC // 840876180518
GAS STARTING / RUNNING WATTS// 10000 / 8000
LPG STARTING / RUNNING WATTS// 9050 / 7250
VOLTAGE // 120 / 240V
FREQUENCY // 60Hz
ENGINE TYPE // OHV
STARTING SYSTEM // ELECTRIC / RECOIL
FUEL TANK SIZE// 8.0 GAL
RUN-TIME (GAS) // UP TO 12 HRS (@50% LOAD)
DECIBLES// 74 dB (@7m @50% LOAD)
CARTON L×W×H// 32.1'' × 22.2'' × 24.4''
GROSS WEIGHT// 230 LBS.
UNIT WEIGHT// 218 LBS.
UNITS PER PALLET// 4
UNITS PER CONTAINER// 188 / 40HQ
BONUS// HOSE HOLDER

CONTROL PANEL
(2) 5-20R 20A-120V GFCI
(1) 14-50R 50A-120/240V
(1) L14-30R 30A-120V/240V TWIST LOCK
(1) L5-30R 30A 120V TWIST LOCK

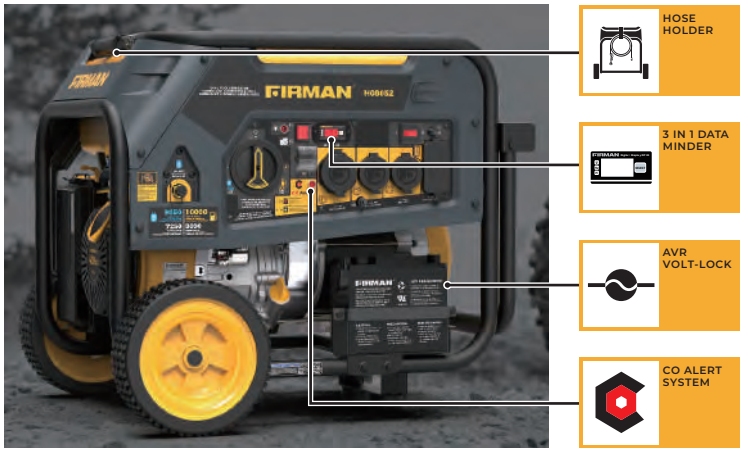

3 YEAR WARRANTY

All products are subject to change.

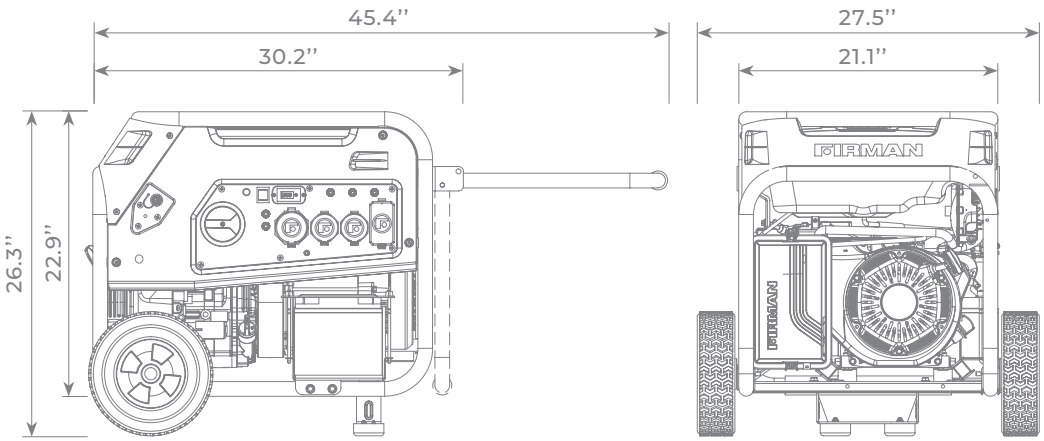

GAS / LP
10000 STARTING WATTS
12-HR
CO Alert™ CARBON MONOXIDE SHUTDOWN
ELECTRIC START

*Regulatory Compliance Notice: Certifications such as EPA, CARB, and other regulatory approvals are subject to change based on government regulations. Please verify current certifications at the time of purchase.

BEST USED FOR


FIRMAN
DUAL FUEL GENERATOR
GENERADOR COMBUSTIBLE DUAL
CARBURANT À DOUBLE GÉNÉRATRICE
FIRMAN® H08052
LPG INLET
Entrada de GLP
Entrée de GPL
9050
STARTING WATTS
VATIOS DE ARRANQUE
PUISSANCE DE DÉMARRAGE
10000
STARTING WATTS
VATIOS DE ARRANQUE
PUISSANCE DE DÉMARRAGE
7250
RUNNING WATTS
VATIOS DE CONTINUOS
PUISSANCE DE FONCTIONNEMENT
8000
RUNNING WATTS
VATIOS DE CONTINUOS
PUISSANCE DE FONCTIONNEMENT
FUEL SELECTOR SWITCH
INTERRUPTOR SELECTOR DE COMBUSTIBLE
CARBURANT SÉLECTEUR
NEUTRAL BONDED TO FRAME
NEUTRO CONECTADO AL BASTIDOR
NEUTRE LIÉ À LA MASSE À LA CHÂSSIS OU MOTEUR
CO Alert
RED / ROJO / ROUGE
YELLOW / AMARILLO / JAUNE
L14-30R
50A 120/240V
L6-30R
30A 120/240V
L5-30R
30A 125V
5-20R
20A 120V GFCI
439cc
OHV
FIRMAN
12V 15Ah/20HR
VALVE REGULATED RECHARGEABLE SEALED LEAD ACID BATTERY
BATERÍA DE PLOMO RECARGABLE REGULADA POR VÁLVULAS
BATTERIE RECHARGEABLE SANS ENTRETIEN AU PLOMB-ACIDE À RÉGULATION PAR SOUPAPE
CAUTION:
• Maintenance free, no water or electrolyte supply.
• Do not incinerate.
• Keep the away and do not expose in hot environment.
PRECAUCIÓN:
• Sin mantenimiento, sin suministro de agua o electrolito.
• No incinerar.
• Mantener lejos del fuego y no exponer en un ambiente caliente.
MISE EN GARDE:
• Sans entretien, sans eau ni électrolyte.
• Ne pas incinérer.
• Tenir à l'écart du feu et ne pas exposer à un environnement chaud.