T08072

All product specifications and certifications are subject to change.

GAS: 10000 / 8000 WATT - LPG: 9050 / 7250 WATT- NG: 6900 / 5500 WATT
50A 120/240V ELECTRIC START TRI FUEL PORTABLE GENERATOR
EPA AND cETL CERTIFIED ANSI / PGMA G300-2018 COMPLIANT


FIRMAN POWER EQUIPMENT
8644 W. Ludlow Dr.
Peoria, AZ 85381
1-844-347-6261
WWW.FIRMANPOWEREQUIPMENT.COM


UPC // 840876180723
GAS STARTING / RUNNING WATTS// 10000 / 8000
LPG STARTING / RUNNING WATTS// 9050 / 7250
NG STARTING / RUNNING WATTS// 6900 / 5500
VOLTAGE // 120 / 240V
FREQUENCY // 60Hz
ENGINE TYPE // OHV
STARTING SYSTEM // ELECTRIC / RECOIL
FUEL TANK SIZE // 8.0 GAL
RUN-TIME (GAS) // UP TO 12 HRS (@50% LOAD)
DECIBLES // 82 dB (@7m @75% LOAD)
CARTON L×W×H// 32.1'' × 22.2'' × 24.4''
GROSS WEIGHT// 234 LBS.
UNIT WEIGHT// 213 LBS.
UNITS PER PALLET// 4
UNITS PER CONTAINER// 180 / 40HQ
BONUS // HOSE HOLDER


CONTROL PANEL
(2) 5-20R 20A-120V GFCI
(1) 14-50R 50A-120/240V
(1) L14-30R 30A-120V/240V TWIST LOCK
(1) L5-30R 30A 120V TWIST LOCK



3 YEAR WARRANTY

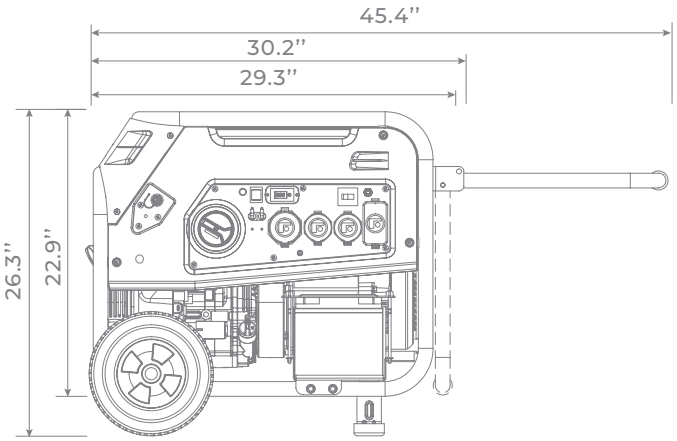

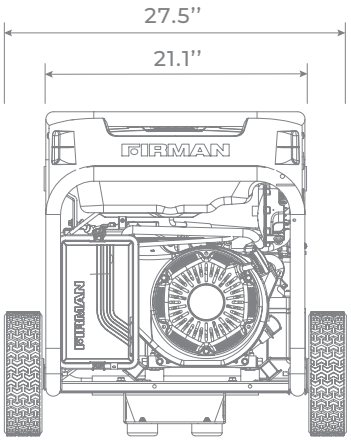

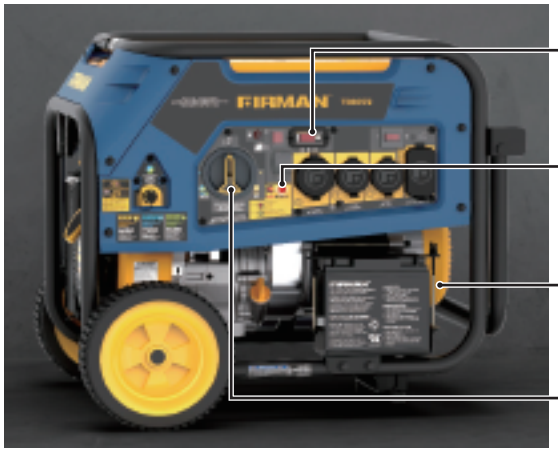

3 IN 1 DATA MINDER
CO ALERT SYSTEM
AVR VOLT-LOCK
FUEL SELECTOR SWITCH

10000 STARTING WATTS
50A 120/240V
12-HR
CO Alert™ CARBON MONOXIDE SHUTDOWN
ELECTRIC START

BEST USED FOR


FIRMAN
T08072
10000
8000
9050
7250
6900
5500
CO Alert
FIRMAN
12V 15Ah/20HR
CAUTION:
PRECAUCIÓN:
MISE EN GARDE: