W03663OF


All product specifications and certifications are subject to change.

4500 / 3650 WATT 120V RECOIL START OPEN FRAME INVERTER GENERATOR
EPA AND cETL CERTIFIED
ANSI / PGMA G300-2018 COMPLIANT


FIRMAN POWER EQUIPMENT
8644 W. LUDLOW DR.
PEORIA, AZ 85381
1-844-347-6261
WWW.FIRMANPOWEREQUIPMENT.COM

UPC // 840876136638
GAS STARTING / RUNNING WATTS// 4500 / 3650
VOLTAGE // 120V
FREQUENCY // 60Hz
ENGINE TYPE // OHV
STARTING SYSTEM // REMOTE / ELECTRIC / RECOIL
FUEL TANK VOLUME// 6.0 GAL
RUN-TIME // UP 22 HRS (@25% LOAD)
DECIBLES// 69 dB (@7m @25% LOAD)
CARTON L×W×H// 28.7'' × 21.1'' × 21.3''
GROSS WEIGHT// 132
UNIT WEIGHT// 119
UNITS PER PALLET// 16
UNITS PER CONTAINER// 256 / 40HQ
BONUS // ADAPTER (L5-30P TO TT-30R)

CONTROL PANEL
(2) 5-20R 20A-120V
(1) 14-50R 50A-120V (NOT FOR 240V USE)
(1) L5-30R 30A-120V TWIST LOCK
(1) DC OUTLET 8.3A-12V
(2) USB OUTLET 2.1/1.0A-5V

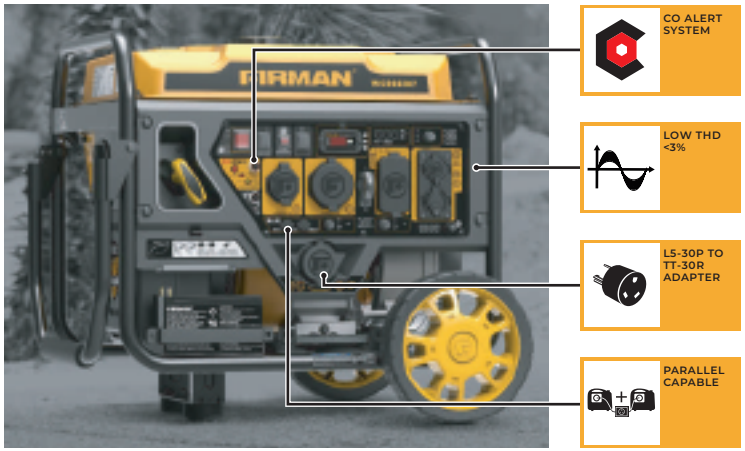

3 YEAR WARRANTY

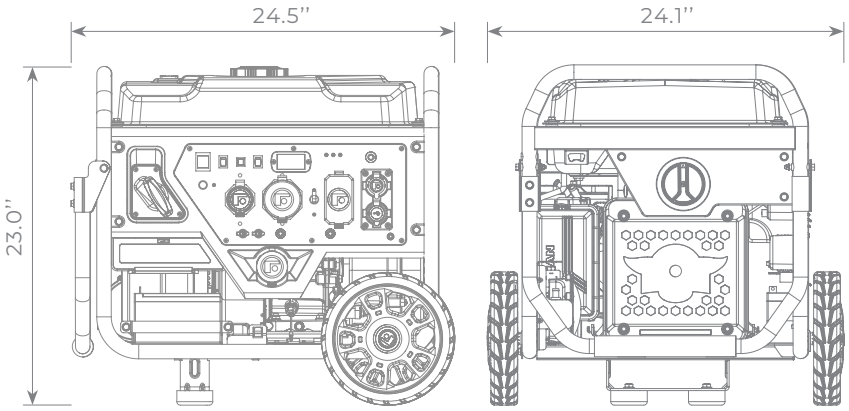

4500 STARTING WATTS
50A / 120V
22-HR
CO Alert™ CARBON MONOXIDE SHUTDOWN
REMOTE START/STOP

BEST USED FOR


FIRMAN
W03663OF
CO Alert
FIRMAN
CAUTION:
PRECAUCIÓN: